


# UNI PLAY SOLO UP 1448

SLIDE 500



Device Specifications	
Safety zone	35,08 m <sup>2</sup>
Length	7,55 m
Width	0,84 m
Total height	5,81 m
Free fall height	< 0,60 m
Age range	3-14 years
In accordance w/ EN standards	1176-1:2017
Weight of the heaviest part [kg]	37
Dimension of the biggest part [cm]	47x75x2
Availability of spare parts	Yes

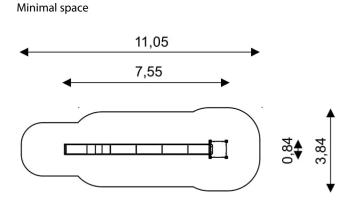

## **Material Specification**

- 90x90 mm main construction made of impregnated, laminated wood of pine;
- Top of the construction is secured with polyethylene caps to protect the wood surface from atmospheric conditions;
- Metal anchors are made of hot dip galvanized steel, protecting the wood from direct contact with the ground to prevent rot and extending the product's life;
- Platform is made of anti-slip and waterproof plywood or HPL plate;
- Panels are made of atmospheric condition resistant HDPE or HPL plates;
- Stainless steel screws or screws covered with plastic caps;
- No sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- · Bars made out of stainless steel;
- · Stainless steel slide with HDPE or HPL side panels;

## Additional comments

- The equipment is certified by an accrediting organization or by certificate of conformity;
- Depth of foundations on a flat surface: 80/70/60 cm;
- The equipment is designed for public playgrounds; The equipment render is of an illustrative nature and shows only the general specification of the equipment, but not its actual appearance. The colours may differ from those demonstrated on render.
- · Slides should not be installed southwards;

### Surfaces

Due to the free fall height of the equipment, the EN sand with minimal layer thickness of 30 cm (A,C),

1176-1:2017 standard allows the following surfaces: turf/soil (A,B,C), synthetic material approved for free fall of 0,35 m (A,B,C)

### **UNI PLAY**